

Thermocouple probes with leads and connectors



MTCK probes

www.intech.co.nz/mtc

Type K thermocouple probes with connectors. Mineral insulated. Isolated junction. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
MTCK-3	Mineral insulated probe with connector. Probe: Diameter: 3mm 310 Stainless steel. Length: 300mm. Temp: Max at probe tip: 1100°C. Connector: Mini plug.	\$62.00
MTCK-4.5	Mineral insulated probe with connector. Probe: Diameter: 4.5mm 310 Stainless steel. Length: 300mm. Temp: Max at probe tip: 1100°C. Connector: Standard plug.	\$73.00
MTCK-6	Mineral insulated probe with connector. Probe: Diameter: 6mm 310 Stainless steel. Length: 300mm. Temp: Max at probe tip: 1100°C. Connector: Standard plug.	\$77.00

Temperature sensor:

Standard calibration in:

Type K.

Type J.

Type T.

Duplex thermocouples.

Probe:

Diameters from 1mm.

Mineral insulated.

Isolated or bonded junctions.

Sheath materials available in:

310 stainless steel.

Inconel.

Nicrobell.

Connectors:

Mini plug.

Mini jack.

Standard plug.

Standard jack.

Standard available in high temp.

Cable:


PVC.

Silicone.

Teflon.

Fibreglass.

Type K thermocouple probes with leads. Mineral insulated. Isolated junction. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
MTLK-4.5	Mineral insulated probe with lead. Probe: Diameter: 4.5mm 310 Stainless steel. Length: 300mm. Temp: Max at probe tip: 1100°C. Lead: 1m 7/0.2 fibreglass cable.	\$69.00
MTLK-6	Mineral insulated probe with lead. Probe: Diameter: 6mm 310 Stainless steel. Length: 300mm. Temp: Max at probe tip: 1100°C. Lead: 75mm solid tails.	\$74.00

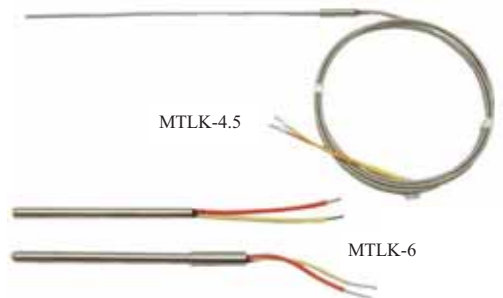

www.intech.co.nz/mtl

Universal thermocouple probes. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
UT-K-xx (C113)	Universal thermocouple probe with bayonet adaptor. Type K Probe: Tip diameter: 4.7mm 310 Stainless steel. Temp: Max at probe tip: 350°C. Adaptor: 1/8 inch BSPT Cable: 4/0.3, fibreglass, SS overbraid. Length: 2.0m 3.5m	\$45.00 \$55.00
UT-J-xx (C113)	Universal thermocouple probe with bayonet adaptor. Type J Probe: Tip diameter: 4.7mm 310 Stainless steel. Temp: Max at probe tip: 350°C. Adaptor: 1/8 inch BSPT Cable: 4/0.3, fibreglass, SS overbraid. Length: 2.0m 3.5m	\$45.00 \$55.00

xx = length

Universal thermocouples



www.intech.co.nz/ut

Handheld probe assemblies



Bead Probe



HHR-01

Temperature sensors:

Standard thermocouples:

- Type K.
- Type J.
- Type T.

Standard RTD sensors:

- Pt100.
- Pt500.
- Pt1000.

Probe:

- Diameters from 3mm.
- Mineral insulated.
- Isolated or bonded junctions.

Connectors:

- Mini plug.
- Standard plug.

Cable:

- PVC.
- Silicone rubber.
- Teflon.
- Tefzel.

Handheld probe assemblies. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
Bead probe	Miniature plug and cable. Type K. Probe: Bead tip. Cable: 1m PVC. Temp: min/max of probe: 0/100°C.	\$21.00
HHR-01	Industrial food probe. Pt100. Probe: 4.7 x 100mm Spear tip. 316 Stainless steel. Cable: 900mm PVC. Curly cord. Temp: min/max of probe: -30/260°C.	\$131.00
HHT-01	Industrial food probe. Type K. Probe: 4.7 x 100mm Spear tip. 316 Stainless steel. Cable: 900mm PVC. Curly cord. Temp: min/max of probe: -30/400°C.	\$121.00
HHT-02	Insertion probe. Type K. Probe: 3.2 x 200mm. Stainless steel. Cable: 900mm PVC. Temp: min/max of probe: -30/600°C.	\$50.00
HHT-03	Mini spear probe. Type K. Probe: 3.2 x 100mm. Stainless steel. Cable: 900mm PVC. Temp: min/max of probe: -30/300°C.	\$40.00
HHT-04	Surface probe. Type K. Probe: Foil sensor. Fast response. Cable: 900mm PVC. Temp: min/max of probe: 0/400°C	\$80.00

www.intech.co.nz/hht



HHT-01



HHT-03



HHT-02



HHT-04