
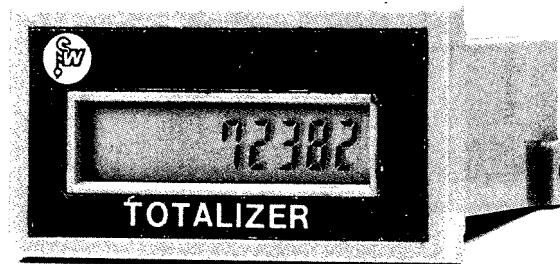


**ELECTRONIC COUNTER TOTALIZER
TYPE LC8M SERIES**

LC8M- 1 OF 1

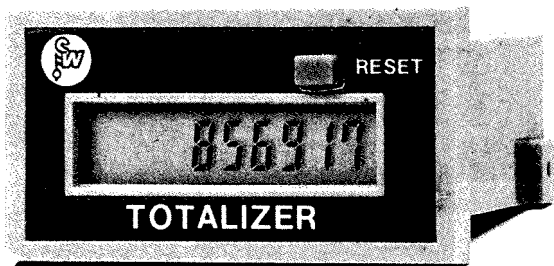

■ SPECIFICATION

DISPLAY
COUNT INPUT SIGNAL

8-DIGIT LCD 6mm HEIGHT
AC VOLT INPUT LC8MA 80-250VAC
CONTACT INPUT LC8MC CONTACT/SWITCH ON OFF
DC VOLT INPUT LC8MD 6-30VDC
UP COUNT




COUNTING DIRECTION
COUNTING SPEED

SPEED/SIGNAL	ACV IN	CONTACT	DCV IN
10 HZ	LC8MA1	LC8MC1	LC8MD1
30 HZ	LC8MA2	LC8MC2	LC8MD2
50 HZ		LC8MC3	LC8MD3
100 HZ			LC8MD4



RESET
BATTERY
BATTERY LIFE
LOW BATTERY
OPERATION AMBIENT
WEIGHT

PANEL RESET, EXTERNAL RESET 2S
UM-3 (AA) 1.5V 2 PCS
3 YEARS
LCD "E" SHOWS LOW BATTERY REPLACE NEW BATTERIES REQUIRED
- 5 TO 40°C, 45-85%RH
100G


■ CONNECTIONS

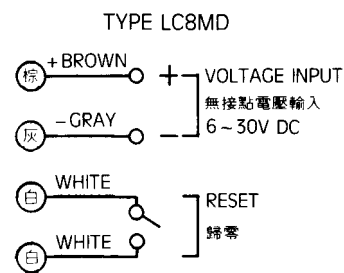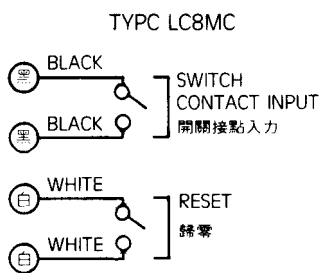

■ DIMENSIONS (mm)

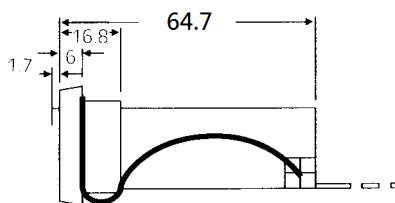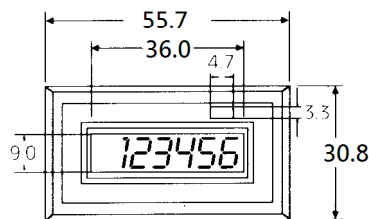

Panel Cut



■ ORDERING INFORMATION

LC8MA1R

- └─ Panel reset, No suffix R=No panel reset
- └─ COUNTING SPEED 1=10 HZ 2=30 HZ 3=50 HZ 4=100 HZ
- └─ A=AC volt Input, C=Switch or Contact input, D=DC Volt input
- └─ Type