


4200 SINGLE LEVEL

4200H^{RA}

METAL STEM

Brass, 316 SST and BUNA N 1/8" NPT ^{RA}

DIMENSIONAL DATA:

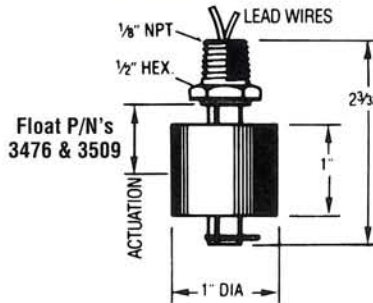

Specifications:

| P/N | Mounting | Stem | Float | Switch | Lead Wires | Operating Temp. | Operating Pressure |
|-------|-------------------------------|------------------------------|---|--------------|---|--|--------------------|
| 41001 | 1/8" NPT <i>See Note 6</i> | Brass | P/N 3476 BUNA <i>See Notes 3 & 11</i> | 20VA SPST | 22 AWG Polymeric 24" Long <i>See Notes 1 & 2</i> | -40° to +180°F in Water | 150 PSIG Max. |
| 41002 | | 316 SST <i>See Note 8</i> | P/N 3476 BUNA <i>See Notes 3 & 11</i> | | | | |
| 41003 | | | P/N 3509 316 SST <i>See Notes 5, 9, 11</i> | | | -40°F to +300°F <i>See Note 10</i> | 400 PSIG Max. |
| 41008 | | | P/N 3482 316 SST <i>See Notes 9, 11, 14</i> | | | 150 PSIG Max. | |

HAZARDOUS LOCATIONS

Models 4200H and 4700H have been tested and approved by Underwriters Laboratories for use in hazardous locations for:


Class I Div. 1 Groups C & D. Unit must be installed in accordance with article 501-4 (A) N.E.C. 1993.

Class I Div. 2 Groups A, B, C & D. Unit to be mounted in a suitable enclosure and wiring to be installed in accordance with article 501-4 (B) N.E.C. 1993.

Class I Div. 1 Groups C & D.
Class I Div. 2 Groups A, B, C & D.

| P/N | Stem | Float P/N |
|-------|---------|-----------|
| 43529 | 316 SST | 3509 |
| 43531 | | 3482 |

P/N 3482
See Note 14



Class I Div. 2 Groups A, B, C & D.

See Notes 15 & 16

| P/N | Stem | Float P/N |
|-------|-------|-----------|
| 43533 | Brass | 3509 |
| 43534 | | 3482 |



4700 SINGLE LEVEL

4700H^{RA}

METAL STEM

316 SST 1/4" NPT

DIMENSIONAL DATA:

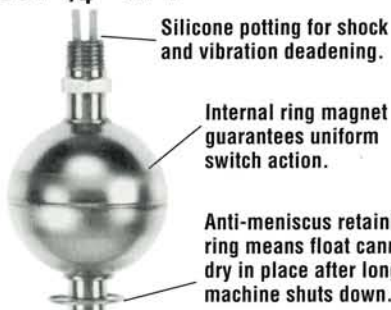

Specifications:

| P/N | Mounting | Stem | Float | Switch SPST <i>See Note 13</i> | Lead Wires | Operating Temp. | Operating Pressure |
|-------|-------------------------------|------------------------------|--|-----------------------------------|---|--|--------------------|
| 41301 | 1/4" NPT <i>See Note 6</i> | 316 SST <i>See Note 8</i> | P/N 3508 316 SST <i>See Notes 4, 9, 11</i> | 20 VA | 18 AWG Polymeric 24" Long <i>See Notes 1 & 2</i> | -40°F to +300°F <i>See Note 10</i> | 750 PSIG Max. |
| 41302 | | | | 100 VA | | | |
| 41321 | | Brass | 20 VA | | | | |

HAZARDOUS LOCATIONS

Class I Div. 1 Groups C & D.
Class I Div. 2 Groups A, B, C & D.

| P/N | Stem | Float P/N |
|-------|---------|-----------|
| 43651 | 316 SST | 3508 |

Class I Div. 2 Groups A, B, C & D.

| P/N | Stem | Float P/N |
|-------|-------|-----------|
| 43653 | Brass | 3508 |

See Note 17