



2024



DISTRIBUTOR **PRICELIST**









INTECH INSTRUMENTS LTD

+64 3 343 0646



export@intech.co.nz



www.intech.co.nz



Christchurch, New Zealand



Intech Instruments Ltd CONDITIONS OF SALE

Note: These terms and conditions apply to all future transactions between Intech Instruments Limited and you.

- Prices: All prices are based on the factory price list as held by Intech at date of quotation, and also on rates of duty and primage, basic wages, freight, insurance and foreign exchange fluctuations at date of quotation. Any increase between the date of quotation and the date of delivery in direct costs other than the factory price resulting from variation in any of these factors or any other factor beyond the reasonable control of Intech shall be payable by the purchaser, provided the Buyer may cancel the Agreement within 7 days of notice of any increase in price. All prices quoted unless otherwise specified are in New Zealand dollars.
- 2. Validity: Unless previously withdrawn our quotation is open for acceptance for the period stated therein, or when no period is stated, within 30 days only from the date thereof, and is subject to confirmation by Intech at the time of such acceptance. The quotation is not deemed to have been accepted until all information required for indenting or ordering of items has been received.
- 3. Government Approval or Import License: Our quotation is subject to the availability of any necessary Government Approval or Import Licences and in the event of such approval or Licence not being forthcoming after reasonable efforts have been made by Intech, Intech may at its option determine the contract of sale and neither party shall have any claim against the other in respect thereof.
- **Delivery:** Where a delivery period is quoted the period will 4. commence when the purchaser accepts or is deemed to have accepted the quotation or upon the granting of Government approval or Import Licence where necessary or (where requested by Intech) upon receipt by Intech of all necessary information and drawings to enable the work to be put in hand whichever is the later. In no circumstances shall Intech be liable for late delivery by reasons of fire, strike, stoppages of work, war, Government action, transport delays, acts of God, shortages of supplies or manufacturers delays or any other cause whatsoever beyond Intech's control. Delivery shall be deemed to be made to the Buyer when the goods are despatched from Intech's premises or at the time when the Buyer is advised of the availability of the goods for dispatch in the event of the Buyer being unable to take delivery immediately. Where the goods are to be supplied and installed by Intech, delivery shall be deemed to be made when the goods are supplied and delivered to the Buyer's premises. Where it is agreed that the goods may be delivered by instalments each delivery is to be regarded as a separate contract and price payable accordingly. Failure of the Buyer to pay for one or more instalments of goods on due dates shall entitle Intech at its option to: a) suspend further deliveries pending payment; and or b) treat the agreement as repudiated by the Buyer.
- Passing of Risk: Risk passes from Intech to Buyer on delivery from which time the goods shall be at the sole risk of the Buyer notwithstanding that payment for such goods may be payable in whole or in part at a later date.
- 6. Property in the goods: Until payment of the whole of the purchase, the property of the goods shall not pass to the Buyer not withstanding that the risk has passed to the Buyer on delivery as aforesaid. Pending full payment, the Buyer agrees to hold the equipment as bailee and in default of payment on the due date of any instalment to return goods in good order and condition to the company.

- Insurance and Transportation: All insurance and transportation charges after delivery are the responsibility of the Buyer. Where requested, Intech will arrange transport and insurance for the goods on behalf of the Buyer and the cost thereof shall be paid by the Buyer
- 8. Damage, etc: Inspection of the goods shall be made by the Buyer immediately upon delivery and in the event of damage, incorrect execution or shortage, the Buyer shall notify Intech in writing within 3 days of receipt of goods, and shall similarly notify the carrier in the case of damage or shortage of goods. Intech shall not be liable in respect of damage or shortage caused in transit, but any insurance arranged as in clause 7 hereof shall be applicable. The Buyer shall afford Intech the opportunity to inspect the goods within a reasonable time following notice and before any use is made. If the Buyer fails to comply with the provisions the goods are conclusively presumed in accordance with the agreement and free of any defect/damage apparent on reasonable examination and the Buyer has deemed to have accepted them.
- Payment: Payment must be tendered to Intech in New Zealand currency at the registered office of Intech by the 20th of the month following the month in which the goods were despatched. Unless stated to the contrary Intech reserves the right to charge interest at 10% per annum on overdue accounts.
- 10. Guarantee: Equipment supplied by Intech Instruments Ltd, unless otherwise stated, is guaranteed against faulty workmanship and material for twelve months from the date of dispatch from Intech's premises. Intech's responsibility is limited to the replacement of defective parts whether the work is carried out on site or at Intech's premises. Equipment may be repaired under guarantee on site or at Intech's premises providing the equipment is returned to Intech freight paid. If the repairs are carried out on site travelling and accommodation costs may be charged at ruling rates. Should Intech be called upon to carry out work under guarantee and find that the fault is not due to faulty workmanship or materials on Intech's part then any costs involved will be added to the contract price and charged accordinaly.
- 11. Limitation of Liability: Intech's liability to you is strictly limited to its obligations under the guarantee. Intech accepts no responsibility for any other damage loss or losses arising from or in any way connected with the goods supplied or services provided whether directly or indirectly and whether by way of consequential loss or otherwise howsoever. If despite the exclusions of liability in this clause Intech is found to be liable to you, the liability shall be limited to the value of the goods or services supplied by Intech to which the claim relates.
- Errors: Quotations are subject to correction by Intech for omissions and typing errors.
- Definition: Wherever the word "Intech" is used it shall be deemed to extend to and include Intech Instruments Limited or its successor or assign.

Due to on going research and development, designs, specifications, and documentation are subject to change without notification.

No liability will be accepted for errors, omissions, or amendments to specifications.

Prices are standard packaging and ex Intech's store, freight is an additional charge.

Temperature probes do not have a warranty.

Intech Instruments Ltd											
Office Location: 59 Mandeville Street	Postal Address: PO Box 8568	Phone	+64 3 343-0646								
Riccarton Christchurch 8011 New Zealand	Riccarton Christchurch 8440 New Zealand	Email	export@intech.co.nz								

VISIT OUR WEBSITE

www.intech.co.nz

Intech Instruments Ltd Distributor Price List - 2024

		International Price Discount Schedule		
		(per purchase order)		
NZ\$	Discount		US\$ / EUR	Discount
0~2,000	0%		0~1,000	0%
2,001~7,500	10%		1,001~5,000	10%
7,501~12,000	15%		5,001~8,500	15%
12,001~28,000	20%		8,501~19,000	20%
28,001 up	23%		19,001 up	23%

Notes:

On any one purchase order, take the total list price of all items you will be ordering. Match this total price against the above list, and deduct the appropriate discount. Please ensure you use the correct currency from the table above.

All prices are FOB Christchurch, New Zealand All bank charges to your account

Model	Description		Price Per Unit (NZ\$)				Per Unit	
		(NZ\$)		(03\$)	(EUR)		
XU Universal Input T	ransmitter Series - Processor, USB Programmable		NZ\$		US\$	5	EUR€	
XU2	Loop Powered Transmitter Isolated Universal Input	\$	169.00	\$	107.00		95.00	
XU2HI	Head Mount Loop Powered Transmitter Isolated RTD & Thermocouple	\$	154.00	\$	98.00	€	87.00	Xum Al-A
XU2HN	Head Mount Loop Powered Transmitter Non Isolated RTD only	\$	83.00	\$	53.00	€	47.00	AND CE A
XU-Spring-Kit	For vibration areas or where wide ambient temperatures exist on the probe head.	\$	10.00	\$	7.00	€	6.00	Xun
XU4	4 wire (powered) Transmitter Isolated Universal Input	\$	210.00	\$	133.00	€	118.00	
XU-USB (Rev 1)	USB Programming Key for programming XU Transmitters with XU Software	\$	83.00	\$	53.00	€	47.00	Interest XU4
XJ2	Single Loop Powered Transmitter - Universal Input, Analogue	\$	214.00	\$	135.00	€	120.00	
XJ22	Dual Loop Powered Transmitter - Universal Input, Analogue	\$	371.00	\$	234.00	€	208.00	A. B. C. S.
XJ4	Single 4 wire (powered) Transmitter - Universal Input, Analogue	\$	314.00	\$	198.00	€	176.00	
XJ4-LV	Single 4 wire (powered) Transmitter - Universal Input, Analogue, Low voltage	\$	381.00	\$	241.00	€	214.00	The state of the s
XID-L1	Single 4~20 to 4~20mA Loop powered isolator, Input Resistance 250Ω	\$	192.00	\$	121.00	€	108.00	
XID-L1	Dual $4\sim20$ to $4\sim20$ mA Loop powered isolators, Input Resistance 250Ω	\$	344.00	\$	217.00		193.00	
XID-L4	Quad $4\sim20$ to $4\sim20$ mA Loop powered isolators, Input Resistance 250Ω	\$	527.00	\$	333.00		296.00	
XID-P1	Single 4~20 to 4~20mA 24Vdc powered isolator	\$	230.00	\$	145.00		129.00	
XI-L1	Single 4~20 to 4~20mA Loop powered isolator, Input Resistance 50Ω	\$	216.00	\$	137.00	€	121.00	
XI-L2	Dual 4~20 to 4~20mA Loop powered isolators, Input Resistance 50Ω	\$	408.00	\$	258.00		229.00	
XI-L4	Quad 4~20 to 4~20mA Loop powered isolators, Input Resistance 50Ω	\$	592.00	\$	373.00	€	332.00	ALLES TO ALLES TO
XI-P1	Single 4~20 to 4~20mA Input powered isolator	\$	264.00	\$	167.00	€	148.00	
XI-P2	Dual 4~20 to 4~20mA Input powered isolators	\$	464.00	\$	293.00	€	260.00	A CONTRACTOR OF THE PARTY OF TH
XI-P4	Quad 4~20 to 4~20mA Input powered isolators	\$	677.00	\$	427.00	€	380.00	

Loop powered / Plug-in / Frequency Tran	1011111				
itters - Analogue		NZ\$	US\$	EUR€	
					No. of the last of
					W. Carlotte
					-
		•			
					2 1100
					1. 1.
	т				The state of the s
Dual LPI-CT CT transmitters	\$	352.00 \$	222.00 €	198.00	
ore Current Transmitters & Switch		NZ\$	US\$	EUR€	
Current transmitter. Selectable ranges: 10A, 20A, 50A. Output 4~20mA.	\$	98.00 \$	62.00 €	55.00	
Current transmitter. Selectable ranges: 100A, 150A, 200A. Output 4~20mA.	\$	98.00 \$	62.00 €	55.00	
	\$	110.00 \$	70.00 €	62.00	
Current transmitter. Selectable ranges: 100A, 150A, 200A. True RMS. Output 4~20mA.	\$	110.00 \$	70.00 €	62.00	
Current switch. Adjustable: 1.5~200A in 3x ranges, self-powered.	\$	76.00 \$	48.00 €	43.00	
	<u> </u>		1		
					-
					-
Potentiometer to DC isolating transmitter (LV option NOT available)		•			
Power supply of 10~28Vac/dc fitted to any PI series transmitter (not for PI-M, PI-P or PI-R)	\$	80.00 \$	51.00 €	45.00	
powered transmitter		NZ\$	US\$	EUR€	
Frequency Input, 4~20mA Output - DIN rail mount unit	\$	338.00 \$	213.00 €	190.00	
	4				_
Isolating DC to frequency interface	\$	269.00 \$	170.00 €	151.00	N S. S. S.
Non-isolating DC to frequency interface	\$	269.00 \$	170.00 €	151.00	
Then boldening be to requeries interruce					
		NZ\$	US\$	FUR€	
Isolating frequency input, divided, to open collector frequency output interface	\$	NZ\$ 269.00 \$	US\$ 170.00 €	EUR€ 151.00	
	DC to DC isolating signal transmitter (Not frequency input - see LPI-F-D below) DC to DC isolating signal transmitter Bridge to DC isolating signal transmitter Potentiometer to DC isolating transmitter RTD to DC isolating transmitter RTD to DC isolating transmitter RTD Pt100 to 4~20mA In-head transmitter DIN Rail Mount Foot option for LPN-R-H Thermocouple to DC isolating transmitter Single RTD to DC non isolating transmitter Single IPI-CT CT transmitter Dual LPI-CT CT transmitter Dual LPI-CT CT transmitters Current transmitter. Selectable ranges: 10A, 20A, 50A. Output 4~20mA. Current transmitter. Selectable ranges: 10A, 20A, 50A. Output 4~20mA. Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. Current switch. Adjustable: 1.5~200A in 3x ranges, self-powered. Analogue - Power supply: 85~264Vac/dc or 22~85Vac/dc selectable DC to DC isolating signal transmitter Frequency to DC isolating signal transmitter Bridge to DC isolating signal transmitter Maths function, DC to DC isolating transmitter Maths function, DC to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter Potentiometer to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resistance to DC isolating transmitter (LV option NOT available) Resis	DC to DC isolating signal transmitter (Not frequency input - see LPI-F-D below) DC to DC isolating signal transmitter Bridge to DC isolating signal transmitter \$ Potentiometer to DC isolating transmitter \$ RTD Pt100 to 4~20mA In-head transmitter \$ DIN Rail Mount Foot option for LPN-R-H \$ Thermocouple to DC isolating transmitter \$ Single RTD to DC non isolating transmitter \$ Single RTD to DC non isolating transmitter \$ Single LPI-CT CT transmitter \$ Single LPI-CT CT transmitter \$ Current Transmitters & Switch Current transmitter. Selectable ranges: 10A, 20A, 50A. Output 4~20mA. \$ Current transmitter. Selectable ranges: 10A, 20A, 50A. Output 4~20mA. \$ Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. \$ Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. \$ Current transmitter. Selectable ranges: 10A, 20A, 50A. True RMS. Output 4~20mA. \$ Current switch. Adjustable: 1.5~200A in 3x ranges, self-powered. Analogue - Power supply: 85~264Vac/dc or 22~85Vac/dc selectable DC to DC isolating signal transmitter \$ Bridge to DC isolating signal transmitter \$ RTD Pt100 to DC isolating transmitter \$ RTD Pt100 to DC isolating transmitter (LV option NOT available) \$ Resistance to DC isolating transmitter (LV option NOT available) \$ Resistance to DC isolating transmitter (LV Power supply option NOT available) \$ Set point alarm unit. Two set points, two relay outputs \$ Power supply of 10~28Vac/dc fitted to any PI series transmitter (not for PI-M, PI-P or PI-R) \$ mitters	DC to DC isolating signal transmitter (Not frequency input - see LPI-F-D below) \$ 220.00 \$ DC to DC to DC isolating signal transmitter \$ 267.00 \$ Bridge to DC isolating signal transmitter \$ 330.00 \$ Potentiometer to DC isolating signal transmitter \$ 330.00 \$ Potentiometer to DC isolating transmitter \$ 306.00 \$ RTD to DC isolating transmitter \$ 225.00 \$ RTD Pt.00 to 4~20mA In-head transmitter \$ 113.00	DC to DC isolating signal transmitter (Not frequency input - see LPI-F-D below) \$ 220.00 \$ 139.00 € DC to DC isolating signal transmitter \$ 267.00 \$ 169.00 € DC to DC isolating signal transmitter \$ 330.00 \$ 208.00 € DC to DC isolating signal transmitter \$ 330.00 \$ 208.00 € DC DC isolating signal transmitter \$ 330.00 \$ 208.00 € DC DC Isolating signal transmitter \$ 330.00 \$ 208.00 € DC DC Isolating transmitter \$ 306.00 \$ 193.00 € DC DC Isolating transmitter \$ 306.00 \$ 193.00 € DC DC Isolating transmitter \$ 225.00 \$ 172.00 € DC DC Isolating transmitter \$ 225.00 \$ 172.00 € DC DC Isolating transmitter \$ 113.00 \$ 72.00 € DC DC DC Isolating transmitter \$ 113.00 \$ 72.00 € DC DC DC DC DC DC Isolating transmitter \$ 247.00 \$ 173.00 € DC	DC to DC Solating signal transmitter \$ 220.00 \$ 139.00 € 124.00

	Signal / Differential Pressure / Indica	itui 3		 		
Signal Transmitters			NZ\$	US\$	EUR€	
N-LF	Line filter	\$	137.00	\$ 87.00		
W-FFA	Flow pulse amplifier	\$	259.00	\$ 164.00	€ 146.00	~ /
Differential Pressure To	ransmitters (For Dry Non-Corrosive Gases)		NZ\$	US\$	EUR€	
PN-DP-100mm	Programmable spans from ±10 to ±100mm W.G. Factory set to 0~100mm W.G.	\$	642.00	\$ 405.00	€ 360.00	
.PN-DP-1000mm	Programmable spans from ±100 to ±1000mm W.G. Factory set to 0~1000mm W.G.	\$	642.00	\$ 405.00	€ 360.00	1.200
~20mA Panel Display	- Surface Mount		NZ\$	US\$	EUR€	
PI-LCD-6	4~20mA Panel Display IP65 (4~20mA Calibrator is NOT required for setup)	\$	394.00	\$ 249.00	€ 221.00	[SCCCC]
rocess Indicators - Ur	iversal Power Supply 24~250Vac / 19.5~250Vdc		NZ\$	US\$	EUR€	
N-uP4	Universal Input Indicator with no outputs. Universal Power Supply.	\$	255.00	\$ 161.00		-
N-uP4X	Universal Input Indicator with 2x Relay outputs (250Vac, 3A Max.) plus 1x 4~20mA Analogue output. Universal Power supply.	\$	346.00	\$ 218.00	€ 194.00	22.60
ıP4-Din-R2	Universal Input Indicator, DIN rail mount & 2 Relay Outputs. Universal Power Supply.	\$	326.00	\$ 206.00	€ 183.00	ATTENDED
ıP4-Din-R2A	Universal Input Indicator, DIN rail mount & 2 Relay Outputs plus One Analogue Output (4~20mA or 0~10Vdc selectable). Universal Power Supply.	\$	416.00	\$ 263.00	€ 233.00	205
(U-USB (Rev 1)	USB Programming Key for programming IN-uP4 / uP4-Din with uP Configure software	\$	83.00	\$ 53.00	€ 47.00	
	Indicators for Special Applications - on Reque	est:				
N-P	Multifunction Process Indicator					
PRC1-	1 x 4~20mA / 0~10V input + 24Vdc excitation	\$	408.00	\$ 258.00		1 24 1
PRC4-	4 x 4~20mA input + 24Vdc excitation	\$	635.00	401.00		509288
TC1-	1 x Thermocouple input. Types B, J, K, N, R, S, T.	\$	408.00	258.00		******
TC4-	4 x Thermocouple inputs. Types B, J, K, N, R, S, T.	\$	635.00	401.00		
RTD1-	1 x RTD Pt100 input	\$	408.00	\$ 258.00		
RTD4-	4 x RTD Pt100 input	\$	635.00	\$ 401.00		
R2-	2 x 5A relay ouputs (for PRC1- model only)	\$		\$ 47.00		
R4-	4 x 5A relay outputs	\$	103.00	\$ 65.00		
R6-	6 x 5A relay outputs (for PRC1- model only)	\$	140.00	89.00		
Α-	1 x 4~20mA / 0~10V analogue output	\$	82.00	52.00		
WS485/ WS232	1 x serial port Isolated RS485 or RS232 (specify)	\$	112.00	\$ 71.00	€ 63.00	
LV	Low Voltage Power Supply, 15~48Vac / 10~72Vdc	\$	55.00	\$ 35.00	€ 31.00	COM MI
	for IN-P. Please contact Intech.					The second
N-R	Large Display Tachometer Indicator	\$	329.00	\$ 208.00		33 10
N-RT	Flow Rate Indicator with Totaliser	\$	420.00	\$ 265.00	€ 236.00	8.0
N-RTB	Flow Rate and Batching Controller	\$	520.00	\$ 328.00	€ 292.00	220
Common Options:						
R2-	2 x 5A relay outputs	\$	74.00	47.00		411125
R4-	4 x 5A relay outputs	\$	103.00	65.00		
A-	1 x 4~20mA / 0~10V analogue output	\$	82.00	52.00		The same
WS485/ WS232	1 x Serial Port Isolated RS485 or RS232 (specify), Includes Modbus RTU (Not available for IN-R)	\$	112.00	\$ 71.00		8960
ĹV	Low Voltage Power Supply, 15~48Vac / 10~72Vdc	\$	55.00	\$ 35.00	€ 31.00	86400

	pH / Humidity / Signal Generator / Overvoltage / Light Intensit	y / Iı	nstrume	nt Po	wer Su	pplies	
pH Transmitter			NZ\$		US\$	EUI	R€
LPI-pH	pH voltage to DC isolating transmitter with LCD display. See page 15 for pH probes.	\$	696.00	\$	439.00	€ 390.0	0
Humidity transmitter			NZ\$		US\$	EUI	R€
IN-HWD	Humidity and Temperature Indicator / Transmitter - Wet & Dry bulb	\$	742.00	\$	468.00	€ 416.0	0
Options	(IN-HWD (rev 2) replaces both 2100-A4-HWD and the older IN-HWD).						# 806 W
R4	4 x 5A Relay Outputs	Т ф	103.00	\$	65.00	€ 58.0	0
WS232/WS485	Serial Port RS232 or RS485; Includes Modbus RTU.	\$	112.00		71.00		
LV	Low Voltage Power Supply; 15~48Vac / 10~72Vdc.	\$	55.00		35.00		
LV	Low Voltage Power Supply, 15~46Vac / 10~72Vac.	>	33.00	\$	35.00	€ 51.0	0
Humidity wet and dry	tank		NZ\$		US\$	EUI	R€
WDT-DW	Wet & Dry Humidity tank & probe assembly	\$	463.00	\$	292.00	€ 260.0	0
WDT-WICK	Spare wick cloth for wet bulb sensor	\$	10.00	\$	7.00		
	I ·						-
Humidity transmitters			NZ\$		US\$		
LPN-H-D (Rev 1)	Humidity and temperature transmitter, Sensirion SHT25 Digital sensor, duct mount	\$	404.00	\$	255.00		
LPN-H-Flange	Optional 100mm flange for LPN-H-D	\$	154.00	\$	98.00		
LPN-H-W (Rev 2)	Humidity and temperature transmitter, Sensirion SHT25 Digital sensor, wall mount	\$	356.00	\$	225.00	€ 200.0	0
LPN-H-CAP	LPN-H Replacement Filter Cap	\$	18.00	\$	12.00	€ 11.0	0
Calibration canisters	for LPN-H transmitters			i I			
LPN-H-CAL	Non Spill calibration canister with 75% and 33% RH salt solutions complete with adaptor.	\$	324.00	\$	205.00	€ 182.0	0
Hand held signal gene	erator		NZ\$		US\$	EUI	R€
IN-GEN	Signal Generator - use with a multimeter to simulate instrument signals.	\$	368.00	\$	232.00	€ 207.0	0
Overvoltage protection	on unit		NZ\$		US\$	EUI	Ω €
LPN-OVP (Rev 1)	Standard DIN rail mount		115.00	¢	73.00		6
LPN-OVP (Rev 1)	Standard DIN rail modrit	\$	115.00	Þ	/3.00	€ 05.0	
Light intensity transn	nitter		NZ\$		US\$	EUI	R€
LPN-LUX	Light intensity 4~20mA transmitter (replaces TWN-LUX)	\$	207.00	\$	131.00	€ 116.0	0
Instrument Quality Po	ower Supplies		NZ\$		US\$	EUI	R€
PSW-10-F	24Vdc Output - 1A Output Current	\$	54.00		35.00		
PSW-2-10-H	PSW-2 High Voltage Power Supply: 100~264Vac/dc. Output Voltage: 10Vdc.	\$	134.00		85.00		
PSW-2-12-H	PSW-2 High Voltage Power Supply: 100~264Vac/dc. Output Voltage: 12Vdc.	\$	134.00		85.00		0
PSW-2-24-H	PSW-2 High Voltage Power Supply: 100~264Vac/dc. Output Voltage: 24Vdc.	\$	134.00		85.00		
PSW-2-24-LV	PSW-2 Low Voltage Power Supply: 12~28Vac / 10~30Vdc. Output Voltage: 24Vdc.	\$	155.00		98.00		
PSW-10-12	PSW-10 High Voltage Power Supply: 12°26Vac/10°36Vdc. Output Voltage: 12Vdc.	\$	218.00		138.00		
	3 3 117						
PSW-10-24	PSW-10 High Voltage Power Supply: 100~264Vac/dc. Output Voltage: 24Vdc.	\$	218.00	\$	138.00	€ 123.0	0

,	Wireless Z-2400-A2 Series / Multiplexers / Comms Converters /	230	0 Series	Remo	te Sta	tions		
Wireless Z-2400-A2 Serie	S		NZ\$		US\$		EUR€	
Z-2400-A2IO	One Wireless Output node and One Input node, Paired & supplied as a Kit:	\$	932.00	\$	588.00	€ :	522.00	
	Input Remote Wireless node. 2x Isolated Universal Inputs, 4x Digital I/O.							
Z-2400-A2I	Note: The Z-2400-A2I can also be used with the Z-2400 Series as part of a MicroScan		Z-		The same of			
	SCADA Wireless system. See page 11.							
Z-2400-A20	Output Remote Wireless node. 2x 4~20mA Outputs, 4x Digital I/O.		Z-	-2400-A2	IO Kit Or	nly		
Z-2400-A2R	Repeater node for Wireless Expansion.	\$	420.00	\$	265.00	€ :	236.00	Intech IN-918 neo
XU-USB (Rev 1)	USB Programming Key for programming Z-2400-A2 Series with uP Configure software	\$	83.00	\$	53.00	€	47.00	
Z-2400-A2 High Gain Antenn	a options ZA (instead of standard whip type).		See Page	11 for c	ptions ar	nd pricing		-
PSW-10-F	24Vdc, 1.0A Instrument Power Supply for the Z-2400-A2 Series	\$	54.00	\$	35.00	€	31.00	
Notes:	All Z-2400 Wireless modules require a 9~36Vdc power supply.	•	•			•		
	2.4GHz modules certified for use in USA, Canada, Europe, Australia and New Zealand.							

Multiplexers	Power supply 85~264Vac/dc or 23~90Vdc (field selectable)	NZ\$	US	S \$	EUR€
2100-M-R	RTD Pt100 inputs	\$ 806.00	\$ 508.0	0 €	€ 452.00
2100-M-I	mA inputs	\$ 806.00	\$ 508.0	0 €	€ 452.00



Converters Serial and Et	hernet		NZ\$	US\$	EUR€	
2400-IS	Isolated Auto-Detecting USB/RS232 to RS485/422/232 Converter	\$	427.00 \$	270.00	€ 240.00	
						Zents
2100-IS-USB	Isolating USB to RS485 or RS422 (selectable) Converter. Relay output for comms failure.	\$	476.00 \$	300.00	€ 267.00	A R A CO R S
2100-NET	Ethernet TCP/IP to RS232/422/485 converter	\$	755.00 \$	476.00	€ 423.00	A STATE OF THE STA
The 2100-NET is used wit	n the 2400/2100 series I/O Remote Stations and Shimaden Controllers when connecting	via Eth	hernet TCP/IP.			
The 2400-A16-NET and 2	100-A16-NET connect directly via Ethernet TCP/IP.					A STATE OF THE STA
2300-NET	Ethernet TCP/IP to RS485 converter, Modbus TCP to Modbus RTU, 24Vdc	\$	475.00 \$	300.00	€ 266.00	
The 2300-NET is used wit	n the 2300 series I/O Remote Stations when connecting via Ethernet TCP/IP.					in the second
PSW-10-F	24Vdc, 1.0A Instrument Power Supply for the 2300-NET	\$	54.00 \$	35.00	€ 31.00	

		NZ\$		US\$	EUR€	
stations cannot share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden C	Controlle	ers.				
8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input	\$	614.00	\$ 387	7.00	€ 344.00	
8x 0~10Vdc (2~10Vdc) inputs, 1.0KV isolation between each input	\$	585.00	\$ 369	9.00	€ 328.00	The state of the s
8x Thermocouple & mV inputs, 350V peak isolation between each input	\$	614.00	\$ 387	7.00	€ 344.00	
6x RTD inputs, Pt100, Pt1000, Ni120, Ni1000	\$	504.00	\$ 318	3.00	€ 283.00	Manufacture Al E
Combination inputs and outputs, single ended	\$	614.00	\$ 387	7.00	€ 344.00	State Constitution of the
2x RTD inputs, 2x 4~20mA inputs OR 2x 0~10Vdc inputs, 1x 4~20mA output, 4x Digital in	puts, 2	x Digital out	puts			
16x Digital inputs	\$	368.00	\$ 232	2.00	€ 207.00	
4x Relay outputs, Change over contacts, One output can be dedicated to Comms Fail Alarm	\$	336.00	\$ 212	2.00	€ 189.00	
8x 4~20mA (0~20mA) outputs, single ended	\$	504.00	\$ 318	3.00	€ 283.00	# TP
24Vdc, 1.0A Instrument Power Supply for the 2300 Series	\$	54.00	\$ 3!	5.00	€ 31.00	
ł	8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input 8x 0~10Vdc (2~10Vdc) inputs, 1.0KV isolation between each input 8x Thermocouple & mV inputs, 350V peak isolation between each input 6x RTD inputs, Pt100, Pt1000, Ni120, Ni1000 Combination inputs and outputs, single ended 2x RTD inputs, 2x 4~20mA inputs OR 2x 0~10Vdc inputs, 1x 4~20mA output, 4x Digital in 16x Digital inputs 4x Relay outputs, Change over contacts, One output can be dedicated to Comms Fail Alarm 8x 4~20mA (0~20mA) outputs, single ended	Stations cannot share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden Controlled 8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input \$ 8x 0~10Vdc (2~10Vdc) inputs, 1.0KV isolation between each input \$ 8x Thermocouple & mV inputs, 350V peak isolation between each input \$ 6x RTD inputs, Pt100, Pt1000, Ni120, Ni1000 \$ Combination inputs and outputs, single ended 2x RTD inputs, 2x 4~20mA inputs OR 2x 0~10Vdc inputs, 1x 4~20mA output, 4x Digital inputs, 2: 16x Digital inputs \$ 4x Relay outputs, Change over contacts, One output can be dedicated to Comms Fail Alarm \$ 8x 4~20mA (0~20mA) outputs, single ended \$ \$	Stations cannot share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden Controllers. 8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input \$ 614.00 8x 0~10Vdc (2~10Vdc) inputs, 1.0KV isolation between each input \$ 585.00 8x Thermocouple & mV inputs, 350V peak isolation between each input \$ 614.00 6x RTD inputs, Pt100, Pt1000, Ni120, Ni1000 \$ 504.00 Combination inputs and outputs, single ended 2x RTD inputs, 2x 4~20mA inputs OR 2x 0~10Vdc inputs, 1x 4~20mA output, 4x Digital inputs, 2x Digital out 16x Digital inputs \$ 368.00 4x Relay outputs, Change over contacts, One output can be dedicated to Comms Fail Alarm \$ 336.00 8x 4~20mA (0~20mA) outputs, single ended \$ 504.00	Stations cannot share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden Controllers. 8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input	Stations cannot share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden Controllers. 8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input	Stations cannot Share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden Controllers. Stations cannot Share a data hi-way with the 2400-XX / 2100-XX stations and/or Shimaden Controllers. 8x 4~20mA (0~20mA) inputs, 1.0KV isolation between each input \$ 614.00 \$ 387.00 € 344.00 8x Thermocouple & mV inputs, 350V peak isolation between each input \$ 614.00 \$ 387.00 € 344.00 6x RTD inputs, Pt100, Pt1000, Ni120, Ni1000 \$ 504.00 \$ 318.00 € 283.00 Combination inputs and outputs, single ended 2x RTD inputs, 2x 4~20mA inputs OR 2x 0~10Vdc inputs, 1x 4~20mA output, 4x Digital inputs, 2x Digital outputs 344.00 16x Digital inputs \$ 368.00 \$ 232.00 € 207.00 4x Relay outputs, Change over contacts, One output can be dedicated to Comms Fail Alarm \$ 336.00 \$ 212.00 € 189.00 8x 4~20mA (0~20mA) outputs, single ended \$ 504.00 \$ 318.00 € 283.00

	Multiplexers / 2400/2100 Series Remote Station	s/e	ze Syste	m				
2400-A16 Isolated Univers	al Analogue and digital input/output Multiplexer / SCADA station		NZ\$		US\$		EUR€	
	Remote station. Up to 16, Isolated Universal Analogue inputs. Dedicated Digital input and rela	y outpi	uts. 85~265V	ac, 95	5~370Vdc Pov	wer supp	ly.	
2400-A16-I16	16 Isolated Universal Input Channels	\$	1,615.00	\$	1,018.00	€	905.00	2100
2400-A16-I8	8 Isolated Universal Input Channels	\$	1,146.86		723.00		643.00	
2400-A16-I16-NET-H	16 Isolated Universal Input Channels, with Ethernet TCP/IP option connection fitted.	\$	1,880.00	\$	1,185.00	€	1,053.00	Contract of the last of the la
2400-A16-I16-SD-NET-H	Remote Station / Intelligent Multiplexer - 16 Inputs, SD Data Logging, Ethernet TCP/IP Comms, High Voltage Power Supply.	\$	2,358.00	\$	1,486.00	€	1,321.00	
Options								the same that the same
-L	Power supply of 10~28Vdc fitted	\$	75.00	\$	48.00	€	42.00	
XU-USB (Rev 1)	USB Programming key for programming 2400-A16 with Intech Micro Station Programmer software (software also for data logging with the 2400-A16-SD-NET)	\$	83.00	\$	53.00	€	47.00	Intech 10-50a nov
2400-R2 Relay expansion u	mit for 2400 A16		NZ\$		US\$		EUD <i>E</i>	
		Τ.					EUR€	
2400-R2	Relay output expansion unit for 2400-A16. Power supply 24Vdc, 10VA.	\$	713.00	\$	450.00	€	400.00	
PSW-10-F	24Vdc, 1.0A Instrument Power Supply for the 2400-R2	\$	54.00	\$	35.00	€	31.00	
2100-A16 Analogue input	Intelligent Multiplexer / SCADA station		NZ\$		US\$		EUR€	
2100-A16	Analogue input remote station. 16 analogue channels. Modbus RTU standard. Power supply 85~264Vac/dc or 23~90Vdc (field selectable)	\$	1,347.00		849.00	€	755.00	
2100-A16-NET	Analogue input remote station. 16 analogue channels. Modbus RTU standard. Ethernet TCP/IP option connection fitted. Power supply 85~264Vac/dc or 23~90Vdc.	\$	1,782.00	\$	1,123.00	€	998.00	
Note 1	Input expansion: This is a standard feature. Supports up to four 2100-M multiplexers. The two ar	nalogu	e outputs ar	e not	t available w	ith this d	option.	The state of the s
Note 2	Output expansion: Supports up to two 2100-R2 relay output modules. This unit allows the station to 'stand alone' as a 16 channel controller for a combination of control	and ala	rm functions.					-
2100-R2 Relay expansion ι	unit for 2100-A16 Power supply 85~264Vac/dc or 23~90Vdc (field selectable)		NZ\$		US\$		EUR€	
2100-R2	Relay output expansion unit (replaces 2100-R, can use 2x 2100-R2 with 2100-A16 rev 1.3)	\$	799.00		504.00	€	448.00	
2100-D Digital input/outpu	at SCADA station Power supply 85~264Vac/dc or 23~90Vdc (field selectable)		NZ\$		US\$		EUR€	
		1.	•					7
2100-D	Digital input/output remote station	\$	960.00	\$	605.00	€	538.00	9
eze System Cloud Based Mo	onitoring (Comes with a limited, free service period).		NZ\$		US\$		EUR€	
ezeio-GSM-S	ezeio Controller. Communications Ethernet TCP/IP, 3G/GSM mobile/cellular network. *Does not include SIM card or ongoing provider charges.	\$	1,678.00	\$	1,058.00	€	940.00	· co:
eze Cable-485	eze Cable RS485 (1m), if using ezeio with a Intech Micro Remote Station.	\$	15.00	\$	10.00	€	9.00	STATE OF THE PARTY
	Contact Intech for Service Options available.							

Mini pack options - Complete Chart Recorder replacement packages											
Mini pack 8 - Up to 8 cl	nannels of recording		NZ\$		US\$		EUR€				
Software	MicroScan R8 recorder Software Package, with USB dongle										
Includes Converter	• Isolated Auto-Detecting Comms Converter USB/RS232 to RS485 [2400-IS] (1 only)										
and Hardware	• Intech Micro 2300 Remote Station (1 only) See below:										
	PSW-10-F Power Supply 24Vdc, 1.0A (1 only)							I work was well			
Option 1	If using 2300-RTD6 (6x RTD Inputs)	\$	2,168.00	\$	1,370.00	€	1,215.00	USB PI3232			
Option 2	Using any other 2300 I/O remote station (see page 7 for available stations)	\$	2,272.00	\$	1,440.00	€	1,273.00	MINI PACK 8			
Alarms	1x 2300-RO4 - Comms fail alarm and/or Alarm outputs Add	\$	320.00	\$	202.00	€	180.00	24/30			
Ethernet	1x 2300-NET - Connect via Ethernet TCP/IP (no 2400-IS) Add	\$	70.00	\$	45.00	€	40.00				

Mini pack 16 - Up to 16 cl	nannels of recording		NZ\$		US\$	EUR€	
Software	MicroScan R16 recorder Software Package, with USB dongle	\$	3,108.00	\$	1,960.00	€ 1,741.00	PROCES
Includes Converter	• Isolated Auto-Detecting Comms Converter USB/RS232 to RS485/RS422 [2400-IS] (1 only)						
and Hardware	• Intech Micro 2400-A16-I16 [16 Isolated Universal Analogue Input Channels] (1 only)						MINI PACK 18
Ethernet	1x 2400-A16-I16-NET - Connect via Ethernet TCP/IP (no 2400-IS) Less	-\$	150.00	-\$	100.00	-€ 84.00	

Mini pack 32 - Up to 32 cl	nannels of recording	NZ\$	US\$		EUR€	
Software	MicroScan R32 recorder Software Package, with USB dongle	\$ 4,767.00	\$ 3,010.00	€	2,670.00	
Includes Converter	• Isolated Auto-Detecting Comms Converter USB/RS232 to RS485/RS422 [2400-IS] (1 only)					
and Hardware	• Intech Micro 2400-A16-I16 [16 Isolated Universal Analogue Input Channels] (2 only)					MINI PACK 52
Ethernet	2x 2400-A16-I16-NET - Connect via Ethernet TCP/IP (no 2400-IS) Add	\$ 130.00	\$ 90.00	€	73.00	

	Submersible Level Train	ionnecci o					
IN-LLT Series (Rev 1)	- Submersible Level Transmitters for Water applications		NZ\$		US\$		
IN-LLT-C-1	0~1m H2O, with 10 metres of cable. 4~20mA output.	\$	800.00	\$ 5	04.00	€ 448.00	
IN-LLT-C-5	0~5m H2O, with 10 metres of cable. 4~20mA output.	\$	800.00	\$ 5	04.00	€ 448.00	
IN-LLT-C17-10	0~10m H2O, with 15 metres of cable. 4~20mA output.	\$	834.00	\$ 5	26.00	€ 468.00	
IN-LLT-C17-20	0~20m H2O, with 30 metres of cable. 4~20mA output.	\$	909.00	\$ 5	73.00	€ 510.00	
IN-LLT-C17-50	0~50m H2O, with 60 metres of cable. 4~20mA output.	\$	1,048.00	\$ 6	61.00	€ 587.00	
IN-LLT-C17-100	0~100m H2O, with 110 metres of cable. 4~20mA output.	\$	1,316.00	\$ 8	30.00	€ 737.00	
IN-LLT-V-5	0~5m H2O, with 10 metres of cable. 0~5Vdc output.	\$	710.00	\$ 4	48.00	€ 398.00	
							A A A
LPN-OVP (Rev 1)	Overload protection unit for lightning	\$	115.00	\$	73.00	€ 65.00	Intech
NAA-101	Terminal box with filter without OVP	\$	92.00	\$	58.00	€ 52.00	The same of the sa
NAA-102	Terminal box with filter and integral OVP	\$	432.00	\$ 2	73.00	€ 242.00	
NAA-209	Overload protection unit for lightning	\$	40.00	\$	26.00	€ 23.00	

ata logging and SCAI	DA Software Packages - Comes complete with USB dongle		NZ\$		US\$	EUF
MicroScan v5 software			т		554	
R8	MicroScan recorder, 8 inputs, 8 outputs	\$	1,312.00	\$	827.00	€ 735.0
R16	MicroScan recorder, 16 inputs, 16 outputs	\$	1,344.00	\$		€ 753.0
R32	MicroScan recorder, 32 inputs, 32 outputs	\$	1,500.00	\$		€ 840.0
R50	MicroScan recorder, 50 inputs, 160 outputs	\$	1,575.00		993.00	€ 882.0
R100	MicroScan recorder, 100 inputs, 160 outputs	\$	2,016.00	\$	1,271.00	€ 1,129.0
200	MicroScan recorder, 200 inputs, 160 outputs	\$	2,730.00	\$	1,720.00	€ 1,529.0
1300	MicroScan recorder, 300 inputs, 160 outputs	\$		\$		€ 1,788.0
R400	MicroScan recorder, 400 inputs, 160 outputs	\$	3,638.00	\$	2,292.00	€ 2,038.0
R600	MicroScan recorder, 600 inputs, 160 outputs	\$	4,462.00	\$	2,812.00	€ 2,499.0
R800	MicroScan recorder, 800 inputs, 160 outputs	\$	5,240.00	\$	3,302.00	€ 2,935.0
R1000	MicroScan recorder, 1000 inputs, 160 outputs	\$	5,922.00	\$	3,731.00	€ 3,317.0
laximum Recorder Lir	nes = 1000 made up of 100 pages with 10 lines on each page		•		•	•
licroScan v5 softwar	e Tag Packages including Recorder, Mimics, Shimaden, DDE	7				
50	MicroScan software package, 50 tags	\$	1,921.00	\$	1,211.00	€ 1,076.0
75	MicroScan software package, 75 tags	\$	2,258.00	\$		€ 1,265.0
150	MicroScan software package, 150 tags	\$	3,276.00	\$		€ 1,835.0
300	MicroScan software package, 300 tags	\$	4,284.00			€ 2,400.0
500	MicroScan software package, 500 tags	\$	5,281.00	\$	-	€ 2,958.0
750	MicroScan software package, 750 tags	\$	6,290.00			€ 3,523.0
5000	MicroScan software package, 750 tags	\$	7,276.00	\$		€ 4,075.0
1aximum Tags = 5000		1 4	7,270.00	Ψ	1,50 1.00	<u> </u>
YM	Symbol Factory Library for Mimics images		POA		POA	PO
ptional software mod			NZ\$		US\$	EUR
B+	MicroScan Tool Box	\$	1,840.00		,	€ 1,031.0
LC	PLC Interface - specify PLC make and model	\$	550.00	\$	347.00	€ 308.0
letwork Drivers						
1	Active PC will support 1 Passive PC	\$	760.00			€ 426.0
2	Active PC will support 2 Passive PC's	\$	1,210.00			€ 678.0
93	Active PC will support 3 Passive PC's	\$	1,660.00			€ 930.0
94	Active PC will support 4 Passive PC's	\$	2,100.00			€ 1,176.0
25	Active PC will support 5 Passive PC	\$	2,540.00		,	€ 1,423.0
P6+	Active PC will support 6 or more passive nodes	\$	2,780.00	\$	1,752.00	€ 1,557.0
pgrade options - Don	gle / Software Key / Version / Package + Modules		NZ\$		US\$	EUF
ersion Upgrade	V4 to V5 = 35% of the equivalent V5 list price		35%		35%	35
	including all modules plus Dongle or License Key Upgrade		JJ 70		33 70	
ackage + Modules	Upgrading to a larger package + modules combination. Price is the dollar difference between	\$	230.00	\$	145.00	€ 129.0
Jpgrade	packages + modules plus and plus Dongle or License Key Upgrade					
ongle Upgrade	If you require a USB (Super Pro) dongle (see Notes below)	\$	396.00			€ 222.0
icense Key Upgrade	If you already have a USB or Parallel (Super Pro) dongle. Replacement for lost file.	\$	181.00			€ 102.0
lote 1:	Dongle options: USB (standard) or Parallel (on special request) - Dongle includes the License Key. Old Sentin	al C don	ales are now re	dunda	ent and must be i	returned to Intech

	MA5 / Shimaden Lite Software				
MicroScan MA5 mobile a	alarm software - for use with MicroScan V5 and Microsoft .NET 2.0	NZ\$	US\$	EUR€	
MA5	For MicroScan V5 software packages. Customer to supply Modem Kit, see Intech for advice'	POA	POA	POA	
	Customer to supply Modem Kit, see Intech for advice.				

Shimaden Lite software		NZ\$	US\$	EUR€	
Shimaden-Lite	Shimaden Lite software package (Note: Shimaden Lite should only be used with Windows 7 or above and is not a replacement for a full SCADA system)	N/C	N/C	N/C	\$ 1920 2 320 2 320

	Z-2400 Series (Wireless MicroScan and Data Loggir	ng Co	mmunic	atio	n)			
ZigBee® Modules. Po	wer Supply: 9~36Vdc.		NZ\$		US\$		EUR€	
Z-2400-RB-T	ZigBee® Base or Router (RS485, RS422, RS232). 100mW	\$	415.00	\$	262.00	€	233.00	A 1
Z-2400-TCP-T	ZigBee® Ethernet - MicroScan or Modbus Base Only. 100mW	\$	643.00	\$	406.00	€	361.00	E
Z-2400-A2I	ZigBee® Input - 2x Universal inputs, 4x Digital inputs, 2x Digital outputs, 2x Relay outputs. 100mW	\$	466.00	\$	294.00	€	261.00	
Z-2400-Sleeper-T	ZigBee® Sleeper Turbo Plug Powered & Battery Powered + 2 Universal Inputs. 1mW	\$	506.00	\$	319.00	€	284.00	
Z-2400-BAT	Replacement Z-2400-Sleeper battery	\$	69.00	\$	44.00	€	39.00	
XU-USB (Rev 1)	USB Programming Key for programming Z-2400-A2I and Z-2400-Sleeper with XU Software	\$	83.00	\$	53.00	€	47.00	Intech 25-028 box
PSW-10-F	24Vdc, 1.0A Instrument Power Supply for the Z-2400 Series	\$	54.00	\$	35.00	€	31.00	
Notes:	All Z-2400 Wireless modules require a 9~36Vdc power supply. 2.4GHz modules certified for use in USA, Canada, Europe, Australia and New Zealand.							

2.4GHz Indoor /Outdoor	High Gain Antennas		NZ\$	US\$		EUR€	
2.4Ghz Indoor Antennas	for Z-2400 Series.						
ZA-OD24-5	2.4Ghz Indoor Antenna for Z-2400 Series. Indoor 5.5dBi Omni Directional Rubber Duck Antenna.	\$	41.00	\$ 26.00	€	23.00	
ZB-P-45	Extension Coax for Z-2400 Series Indoor Antenna. RP-SMA Type with Bulkhead 0.2m.	\$	32.00	\$ 21.00	€	18.00	
2.4Ghz Outdoor Antenna seal)	A Kits for Z-2400 Series. (Outdoor antennas are supplied with mounting brackets and coax-						
ZA-OD24-2	Outdoor 2.2dBi Omni Directional Whip Antenna, wall mount bracket complete with 0.5m Coax Cable with bulkhead and 1.5m Coax Seal.	\$ 1	40.00	\$ 89.00	€	79.00	/
ZA-OD24-8	Outdoor 8dBi Omni Directional Monopole Antenna complete with 5m Coax Cable and 1.5m Coax Seal.	\$ 3	44.00	\$ 217.00	€ 1	93.00	
ZA-PG24-19	Outdoor 19dBi Directional Parabolic Grid Antenna complete with 5m Coax Cable and 1.5m Other options available on request: https://www.intech.co.nz/product/z-2400-a2-antennas/		36.00	\$ 149.00	€ 1	33.00	

			EUR€ each	1
Digi Radio Modem for RS485/422 \$ 7-	746.00 \$	\$ 470.00	€ 418.00	

	Data Loggers							
HR Series Data Logger	s - rugged 304 stainless steel case		NZ\$		US\$		EUR€	
Γ-HR	Single temperature. IP68 rating	\$	357.00	\$	225.00	€	200.00	
HT-HR	Humidity and temperature	\$	511.00	\$	322.00		287.00	Intech MERR
Гс-HR	Dual temperature. Type J, K, N, R, T (Does not include thermocouple probe)	\$	486.00	\$	307.00	€	273.00	
HHT-03	Type K thermocouple temperature probe for Tc-HR	\$	64.00	\$	41.00	€	36.00	Intech ECCI
	70mm lead c/w plugs (Specify thermocouple type).							
Tc-HR Plug Set	Includes Switchcraft plug (logger end) and Mini jack (connects to T/c Mini plug).	\$	50.00	\$	32.00	€	28.00	
	Mini plugs are also available on request.							
Pt-HR	Dual temperature. RTD Pt100/Pt500/Pt1000 (Does not include RTD probe)	\$	438.00	\$	276.00		246.00	
TP-Pt100	RTD Pt100 temperature probe for Pt-HR, range -100~150°C	\$	145.00	\$	92.00		82.00	
mV-HR	milli-Volt ±50mV / ±100mV / ±200mV / ±400mV dc range (does not include test lead)	\$	434.00	\$	274.00	€	244.00	10
mV-HR Lead	Test lead set	\$	95.00	\$	60.00	€	54.00	
WT-HR	Water level, air temperature, and water temperature							
Water level,	0~0.25m WT-HR-250	\$	621.00	\$	392.00	€	348.00	
5 ranges	0~0.5m WT-HR-500	\$	639.00	\$	403.00	€	358.00	
_	0~1.0m WT-HR-1000	\$	702.00	\$	443.00	€	394.00	
	0~1.5m WT-HR-1500	\$	765.00	\$	482.00	€	429.00	
	0~2.0m WT-HR-2000	\$	801.00	\$	505.00	€	449.00	
	Option for 316 S/S for salt water	\$	123.00	\$	78.00		69.00	
			442.00			•	240.00	
pH-HR	pH and temperature (Does not include pH probe - see Page 15 for probes)	\$	442.00	\$	279.00	€	248.00	
pH-HR Plug Set	Fit plug set to pH sensor for use with pH-HR logger. We recommend using a pH sensor fitted with a RTD Pt100 sensor for the best possible accuracy.	\$	50.00	\$	32.00	€	28.00	-
GP-HR	4 input general purpose logger (Also requires the Add on probe sets below)	\$	447.00	\$	282.00	€	251.00	Intech Cas
Add on probe sets for GP-HR	Standard probe sets are listed. Other combinations available - Contact Intech.							
mA1-PS	One 4~20mA or 0~20mA input	\$	63.00	\$	40.00	€	36.00	
mA3+P-PS	Three 4~20mA or 0~20mA inputs c/w one pulse input	\$	84.00	\$	53.00	€	48.00	- 1
##VD3-PS	Three DC voltage inputs. ## = Specify voltage up to 32Vdc	\$	75.00	\$	48.00	€	42.00	
L-PS	Light energy cable	\$	70.00	\$	45.00	€	40.00	
Pt3-PS	Three RTD Pt1000 temperature probes, range -50~130°C (Logger maximum RTD Pt1000 range is -100~400°C)	\$	220.00	\$	139.00	€	124.00	
P100-HR-PS	Pressure sensor. Range = -15~100psi (Overload 200psi, Burst 500psi).	\$	520.00	\$	328.00	€	292.00	- 11
P300-HR-PS	Pressure sensor. Range = -15~300psi (Overload 600psi, Burst 1500psi).	\$	520.00	_	328.00		292.00	- 1
R-PS	One Slow Pulse for Rain Gauge input	\$	63.00		40.00		36.00	- 11
Flow-mA2-PS	Coil or open collector plus two 4~20mA inputs	\$	105.00		67.00		59.00	Ų
ACM-mA2-PS	Flow metering off the pump run contact plus two 4~20mA inputs	\$	98.00	\$	62.00		55.00	
-								
Replacement Battery I								
DLC Tester Mk4	Contains One Mark4 battery. Comes complete with stainless tube, 2 Orings & new label.	\$	125.00		79.00		70.00	
DLC Tester Mk4 Kit	Contains Three Mark4 batteries. Comes complete with stainless tube, 2 Orings & new label.	\$	200.00	\$	126.00		112.00	
HR-Battery Mk4	Spare Mark4 battery ONLY available at the time of purchase of an HR Data logger.	\$	73.00	\$	46.00	€	41.00	12.07 cm. Fe 2000 cm.
HR-Battery Mk3	Mark3 loggers must be returned to Intech for factory replacement of batteries.							Freidon Jahren Albert
DLC3USB	Spare HR Series download cable (USB)	\$	122.00	\$	77.00	€	69.00	Lite Hills of About Art
	Omni7 software is free to download from our website	-						********

	Data Loggers continued							
Data Loggers (continued)			NZ\$		US\$		EUR€	
GP-MC	10 channel universal input logger (Also requires the Add on probe sets below)	\$	650.00	\$	410.00	€	364.00	
Seahorse	Option: IP66 Weatherproof enclosure	\$	300.00	\$	189.00	€	168.00	
Add on probe sets for	GP-MC Inputs are individually configurable using OmniLog. Each input requires conditioning	g using	a 'Probe Se	et'.				GP-MC
GP-MC	Probe set prices are per input as follows: Contact Intech for other available options.							
mA-MC-PS	One 4~20mA or 0~20mA input	\$	50.00	\$	32.00	€	28.00	
##VD-MC-PS	One Voltage input - available ranges are: $5VD-MC-PS = 0\sim5Vdc$, $10VD-MC-PS = 0\sim10Vdc$, $24VD-MC-PS = 0\sim24Vdc$, $32VD-MC-PS = 0\sim32Vdc$. Maximum voltage input for the GP-MC is $32Vdc$ - for voltages above $32Vdc$ use an intermediary transmitter like the PI-D	\$	53.00	\$	34.00	€	30.00	And the second s
P100-MC-PS	Pressure sensor. Range = -15~100psi (Overload 200psi, Burst 500psi).	\$	490.00		309.00	€	275.00	
	Pressure sensor. Range = -15~300psi (Overload 600psi, Burst 1500psi).	\$	490.00	\$	309.00	€	275.00	
Pt1000-MC-PS	RTD Pt1000 Temperature Probe, range -50~130°C Logger maximum RTD Pt1000 temperature range is -100~400°C	\$	99.00	\$	63.00	€	56.00	•
Flow-MC-PS	Coil or open collector	\$	105.00	\$	67.00	€	59.00	Later strategic
ACM-MC-PS	Flow metering off the pump run contact	\$	98.00	\$	62.00	€	55.00	ELANGULARIAN DA LA
DLC5USB	Spare GP-MC download cable (USB)	\$	122.00	\$	77.00	€	69.00	*********
	Omni7 software is free to download from our website							
LCD Series	LCD display means realtime readings can be viewed without connecting the logger to a com	nputer						٨
HT-LCD	Humidity and Temperature (Internal) ±3.0%RH accuracy from 20%RH to 80%RH	\$.00.00	\$	276.00		246.00	
THT-LCD	Humidity and Temperature (External) (complete with standard HT11-Probe)	\$	585.00	\$	369.00	€	328.00	1000
HT11-Probe	Digital humidity sensor with ±3.0%RH accuracy from 20%RH to 80%RH	\$	240.00	\$	152.00	€	135.00	00
Tc-LCD	Dual temperature. Accepts Thermocouple Types J, K, N, R, T (Does not include probe)	\$	428.00	\$	270.00	€	240.00	
HHT-03	Type K temperature probe for Tc-LCD	\$	64.00	\$	41.00	€	36.00	Skill Comment
Pt-LCD	External RTD temperature sensor, range -200~600°C (Does not include probe) Accepts RTD Pt100, Pt500 and Pt1000 type probes.	\$	428.00	\$	270.00	€	240.00	00
	RTD Pt100 temperature probe for Pt-LCD, range -100~150°C	\$	138.00	\$	87.00	€	78.00	1000000
P-LCD	Pressure (Does not include sensor) Sensor (1/8 inch NPT) options below:	\$		\$	270.00		240.00	
P100-LCD-PS	Range -15~100psi (Overload 200psi, Burst 500psi) with 500mm cable	\$		\$	221.00	€	196.00	
P300-LCD-PS	Range -15~300psi (Overload 600psi, Burst 1500psi) with 500mm cable	\$	350.00	\$	221.00	€	196.00	DESTRUCTION AND ADDRESS OF
Seahorse	Option: IP66 Weatherproof enclosure for LCD Series data loggers	\$	300.00		189.00		168.00	Burnellah Jalah Alash la
DLC8USB	Spare LCD Series download cable (USB)	\$	122.00	\$	77.00		69.00	ELLANDAR LANGUAGO
	Omni7 software is free to download from our website							Lanananana

	Environmental Monitoring System	ms					
SMALL Environmental Monito	ring Systems		NZ\$		US\$	EUR€	
GP-HR-LB	GP-HR data logger in L-Bar with attachment plate and two 50mm U bolts.	\$	590.00	\$	372.00 €	331.00	No. of Concession, Name of Street, or other party of the Concession, Name of Street, or other pa
	add Ground temperature	\$	110.00	\$	70.00 €	62.00	
	add Air temperature and Humidity in Shield (Note: counts as two channels)	\$	505.00	\$	319.00 €	283.00	
ndd any three of the	add Leaf wetness	\$	298.00	\$	188.00 €	167.00	
ollowing	add Solar Radiation	\$	210.00	\$	133.00 €	118.00	
ollowing	add Wind direction	\$	580.00	\$	366.00 €	325.00	l
	add 4~20mA input	\$	72.00	\$	46.00 €	41.00	
	add Voltage input	\$	72.00	\$	46.00 €	41.00	
	add Windspeed	\$	540.00	\$	341.00 €	303.00	
add any one of the following	add Rain Gauge input	\$	72.00	\$	46.00 €	41.00	
add any one of the following	add 1mm Rain Gauge	\$	270.00	\$	171.00 €	152.00	TO THE LINE OF
	add 0.2mm Rain Gauge	\$	398.00	\$	251.00 €	223.00	PHIRAPPIAN
Г-Bar	If you require Windspeed and Direction, use a T-Bar rather than an L-Bar	\$	48.00	\$	31.00 €	27.00	a und at a m
add download cable	DLC3USB download cable (USB) - Omni7 software is free to download online	\$	122.00	\$	77.00 €	69.00	***
MEDIUM Environmental Moni	toring Systems		NZ\$		US\$	EUR€	
GP-MC	10 channel universal input logger	\$		\$	410.00 €	364.00	
	Option: IP66 Weatherproof enclosure	\$		\$	189.00 €	168.00	
	Option: add External socket on Logger enclosure	\$	72.00	\$	46.00 €	41.00	
	add Ground temperature	\$	110.00	\$	70.00 €	62.00	
	add Air temperature and Humidity in Shield (Note: counts as two channels)	\$	505.00	\$	319.00 €	283.00	
add any eight of the	add Leaf wetness	\$	298.00	\$	188.00 €	167.00	
following	add Solar Radiation	\$	210.00	\$	133.00 €	118.00	
ollowing	add Wind direction	\$	580.00	\$	366.00 €	325.00	
	add 4~20mA input	\$	72.00	\$	46.00 €	41.00	
	add Voltage input	\$	72.00	\$	46.00 €	41.00	
	add Windspeed	\$	540.00	\$	341.00 €	303.00	
add any two of the following	add Rain Gauge input	\$	72.00	\$	46.00 €	41.00	
and any two or the ronowing	add 1mm Rain Gauge	\$	270.00	\$	171.00 €	152.00	
	add 0.2mm Rain Gauge	\$	398.00	\$	251.00 €	223.00	
add any five of the following	add Air temperature, Humidity and Pressure in Shield	\$	750.00	\$	473.00 €	420.00	
idu aliy live of the following	add Air temperature and Humidity in Shield	\$	610.00	\$	385.00 €	342.00	TOTAL TOTAL PROFILE AND DES
	add L-Bar with attachment plate and two 50mm U bolts and attach sensors.	\$	179.00	\$	113.00 €	101.00	Elevator Maria AME
Mounting	add L-bar with attachment plate and two bullin o boits and attach sensors.	IΨ	1, 5.00	Ψ		101.00	THE RESIDENCE OF COMPANY AND ADDRESS OF THE PERSON OF THE
Hounting	add T-Bar with attachment plate and two 50mm U bolts and attach sensors.	\$		\$	140.00 €	124.00	List Hill at share


Temperature Probes

Wall Mount RTD Probes			NZ\$	US	EUR€	
WMR-S6.4-100-CB-N-N-N	Wall mount pvc conduit box probe. 6.4 x 100mm IP44 (-20~80°C).	\$	95.00	\$ 60.00	€ 54.00	
Gland	Optional cable gland for WMR-CB above	\$	10.00	\$ 7.00	€ 6.00	·
WMR-S6.4-100-AH-N-N-N	Wall mount alloy head probe. 6.4 x 100mm IP67 (-40~110°C).	\$	150.00	\$ 95.00	€ 84.00	
	Other Temperature Sensors available on request.	•				

Weather Sensor Transc	Weather Sensor Transmitters - 4~20mA Outpunitters - 4~20mA Outputs (Individual)		NZ\$		US\$	FII	R€
H-CL	Humidity sensor c/w 1.5m cable (0~100%)		272.00			€ 153.	
r-CL	Temperature sensor c/w 1.5m cable (0.710070) Temperature sensor c/w 1.5m cable (-30~70°C)	d d	234.00			€ 133.	
BP-CL	Barometric Pressure sensor c/w 1.5m cable (700~1100hPa)	4	272.00			€ 152.	
LE-CL	Light energy sensor c/w base plate and 5m cable (0~1500 w/m²)	ф ф	501.00			€ 133. € 281.	
NS3-CL	Wind speed (3 cup) c/w 5m cable (1.5m/sec start, 20mA = 60m/sec)	- 	776.00			€ 281. € 435.	
WS6-CL WS6-CL		→				€ 435. € 590.	
	Wind speed (6 cup) c/w 5m cable (0.45m/sec start, 20mA = 80m/sec)	\$	1,053.00				
WD-CL	Wind direction c/w 5m cable (0°~360°)	\$	776.00			€ 435.	
RAIN	0.2mm Rain Gauge, Pulse output, Pole mount.	\$	410.00			€ 230.	
RAIN-CL	0.2mm Rain Gauge (4~20mA output via included PI-F transmitter, 0~55mm/hr)	\$	997.00	\$	629.00	€ 559.	00
Mounting Options		 			24.22		
.B	L-Bar with attachment plate and two 50mm U bolts	\$	136.00			€ 77.	
ГВ	T-Bar with attachment plate and two 50mm U bolts	\$	179.00	\$	113.00	€ 101.	00
	Solar Radiation Shield - used for more accurate measurement of temperature, humidity			١.		_	
Shield	and barometric pressure sensors. (Does not include sensors)	\$	321.00	\$	203.00	€ 180.	00
	Must be attached to L-Bar or T-Bar.	\bot					
	nitters - 4~20mA Outputs (Fully Mounted on T-Bar mounting arm)		NZ\$		US\$	EU	
NS3-WD-TB-CL	Wind speed 3 cup, wind direction, mounted on T-Bar c/w 5m cable	\$	1,848.00	\$	1,165.00	€ 1,035.	00
	Wind speed 3 cup, wind direction, Temperature, Humidity and Barometric Pressure						
WS3-WD-THP-TB-CL	Sensors, all housed in solar Radiation Shield mounted on T-Bar mounting arm c/w 5m	\$	3,113.00	\$	1,962.00	€ 1,744.	00
	cable.						0.2500.000
TUD LD CL	Temperature, Humidity and Barometric Pressure Sensors, all housed in solar Radiation	4	1 200 00	4	074.00	C 777	
THP-LB-CL	Shield mounted in L-Bar mounting arm c/w 5m cable.	\$	1,386.00	\$	874.00	€ 777.	00
Options	•						
NS6	Fit WS6 (Wind speed 6 cup), instead of WS3 (used for lower starting speeds)	\$	306.00	\$	193.00	€ 172.	00
LE-CL	Light Energy Sensor	\$	501.00			€ 281.	
	<u> </u>						
oH & ORP Sensors - We	edgewood Analytical		NZ\$		US\$	EU	R€
M-10	General purpose ½" NPT pH sensor	\$	358.00			€ 201.	
M-10-ORP	General purpose 1/2" NPT ORP sensor	\$	416.00			€ 233.	
1 20 010	General purpose 72 11 1 Old Sensor	1 4	110.00	Ι Ψ	203.00	255.	
M-11	General purpose 3/4" NPT pH sensor	¢	486.00	¢	307.00	€ 273.	00
M-11-Pt100	General purpose 34" NPT pH sensor. Includes a RTD Pt100 sensor	\$	601.00		379.00		
M-11-Pt100-HT	General purpose 34" NPT pH sensor. High temp. version including a RTD Pt100 sensor	4	691.00			€ 387.	
4-11-P(100-111	General purpose 94 NFT pri sensor. High temp. Version including a KTD FC100 sensor	ĮΨ	091.00	ĮΨ	T30.00	€ 367.	00
M-12	General purpose 34" NPT pH sensor	+	484.00	4	305.00	€ 272.	00
		3	601.00				
M-12-Pt100	General purpose 3/4" NPT pH sensor. Includes a RTD Pt100 sensor	\$				€ 337.	
M-12-Pt100-HT	General purpose 3/4" NPT pH sensor. High temp. version including a RTD Pt100 sensor	\	691.00) \$	436.00	€ 387.	JU
	0 1 2/// NDT 11 21 1 2 2 2 2	1 1	F04.00	٠.	222.22	6 202	20
M-21	General purpose 3/4" NPT pH sensor with long insertion length	\$	521.00	\$	329.00	€ 292.	UU 🔪
M-21-Pt100	General purpose 34" NPT pH sensor with long insertion length. Includes a RTD Pt100	\$	629.00	\$	397.00	€ 353.	00
	sensor	۳	025.00	۳	337.00	. 555.	
M_21_D+100_UT	General purpose 34" NPT pH sensor with long insertion length. High temp. version	1		Ι.			[
M-21-Pt100-HT	including a RTD Pt100 sensor	\$	719.00	\$	453.00	€ 403.	nn I

Visit Intech Online at: www.intech.co.nz

For all your instrumentation requirements

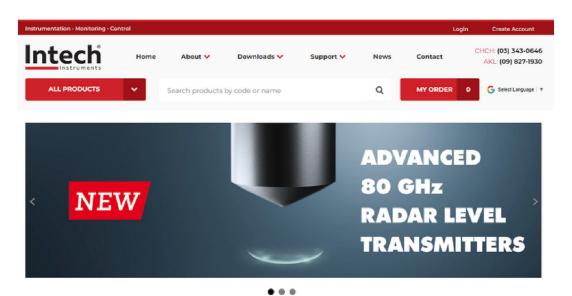

Instrumentation Specialists

We help industries to monitor and control processes











