

# Model 10 General Purpose pH Sensor

## Features

- Select pH or ORP Measurement
- Temperature Compensation Pt100 or Pt1000
- Non-fouling porous Teflon® Liquid Junction
- Large Volume Reference Electrolyte Reservoir
- Compact Design
- 1/2" MNPT Process Connections
- Designed for Flow Through and Submersion Applications
- Suitable for High Temperature Use

## Applications

- Potable Water
- Cooling Towers
- Surface Water Monitoring
- Fresh and Salt Water Aquariums
- Fish Farming
- Hydroponics

## Description

**Model 10 pH Sensor** is designed for use in general purpose water applications. The large volume single junction reference cell coupled with the non-fouling porous Teflon® liquid junction assures a long life in general service.

## Specifications

Body Material	Ryton®
O-Rings	Viton®
Measuring Range	0 to 14 pH
Temperature Range	-5 to 80°C (23 to 176°F) Standard Version 25 to 110°C (77 to 230°F) High Temp Version
Pressure Range	0 to 6.9 bar (0 to 100 psig)
Drift	< 2.0 mV/week
Response Time @ 25°C (77°F)	95% of reading in 10 seconds
pH Glass Bulb Impedance @ 25°C (77°F)	80 Megohms (Standard Version) 150 Megohms (High Temp Version)



<sup>1</sup> United States Patent No. 4,128,468

® Teflon and Viton are Registered Trademarks of E.I. DuPont de Nemours Company

® Ryton is a registered trademark of Phillips 66 Co.



INNOVATIVE SENSORS INC.  
REGISTERED TO ISO 9001  
CERTIFICATE NO. 00-1011



### Intech Instruments Ltd.



Christchurch: 59 Mandeville Street, Riccarton, Christchurch 8011  
Auckland: 70 Central Park Drive, Henderson, Auckland 0610  
New Zealand

Phone: +64 03 343 0646  
Phone: +64 09 827 1930

# Model 10 General Purpose pH Sensor

## Ordering Information

Model 10	Description
M-10	General Purpose pH Sensor with Protective Guard Single Junction Reference Cell No Temperature Compensation Process Connections 1/2" MNPT Insertion Length 16.5mm (0.65") 4.6m (15 ft.) Cable
Measurement Options	Description
ORP	Platinum ORP Electrode
M-10-ORP	Example Order Number

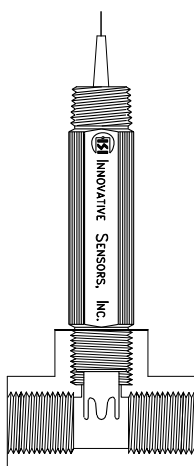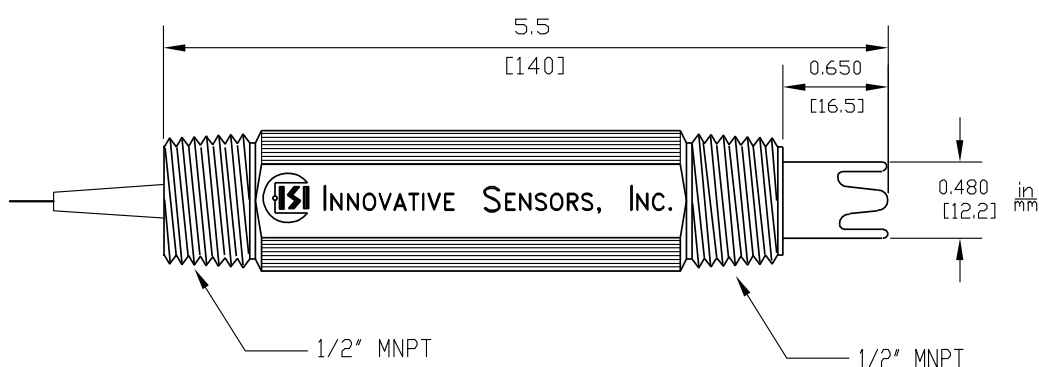

### Flow Installation

- 1/2" NPT Pipe Tee (By Others)
- Use Teflon® Tape on Sensor to permit removal for routine maintenance
- Install shut off valves upstream and downstream of sensor
- Optimum flow rate is 3 to 5 GPM
- Sensor must remain in solution at all times

Note: Variations in design of plastic plumbing parts from different manufactures can be expected. Check tolerances prior to installation.

### Wire Colours:

Black = pH - reference (REF)  
Clear = pH + internal (INT)  
Red = PT100 (TC)  
White = PT100 (TC)

Red/White are interchangeable.

### Intech Instruments Ltd.

Christchurch: 59 Mandeville Street, Riccarton, Christchurch 8011  
Auckland: 70 Central Park Drive, Henderson, Auckland 0610  
New Zealand

Phone: +64 03 343 0646  
Phone: +64 09 827 1930